


SMW 150 - PERFORMANCE WITH 4-POLE MOTORS 1400 REVS. INPUT

| TYPE | i=ratio | n2 r/min | Kw=P1 | Nm=T2 | f.s. | Possible types of motor connections | |
|---------|---------|----------|-------|-------|--------|-------------------------------------|---------|
| SMW 150 | 7.5 | 186.7 | 7.50 | 348 | 2.2 | 132 | B5/B14 |
| | 10 | 140.0 | 7.50 | 455 | 1.8 | 132 | B5/B14 |
| | 15 | 93.3 | 7.50 | 660 | 1.2 | 132 | B5/B14 |
| | 20 | 70.0 | 7.50 | 877 | 1.0 | 132 | B5/B14 |
| | 25 | 56.0 | 7.50 | 1071 | 0.9 | 132 | B5/B14 |
| | 30 | 46.7 | 7.50 | 1225 | 0.8 | 132/112/100 | B5/B14 |
| | 40 | 35.0 | 5.50 | 1173 | 0.9 | 132/112/100 | B5/B14 |
| | 50 | 28.0 | 4.00 | 1023 | 0.9 | 100 | B5/B14 |
| | 60 | 23.3 | 3.00 | 886 | 1.1 | 100 | B5/B14 |
| | 80 | 17.5 | 3.00 | 1112 | 0.8 | 100/90 | B5/B14* |
| 100 | 14.0 | 1.50 | 652 | 1.1 | 100/90 | B5/B14* | |

* 90 only B5

DIMENSIONS

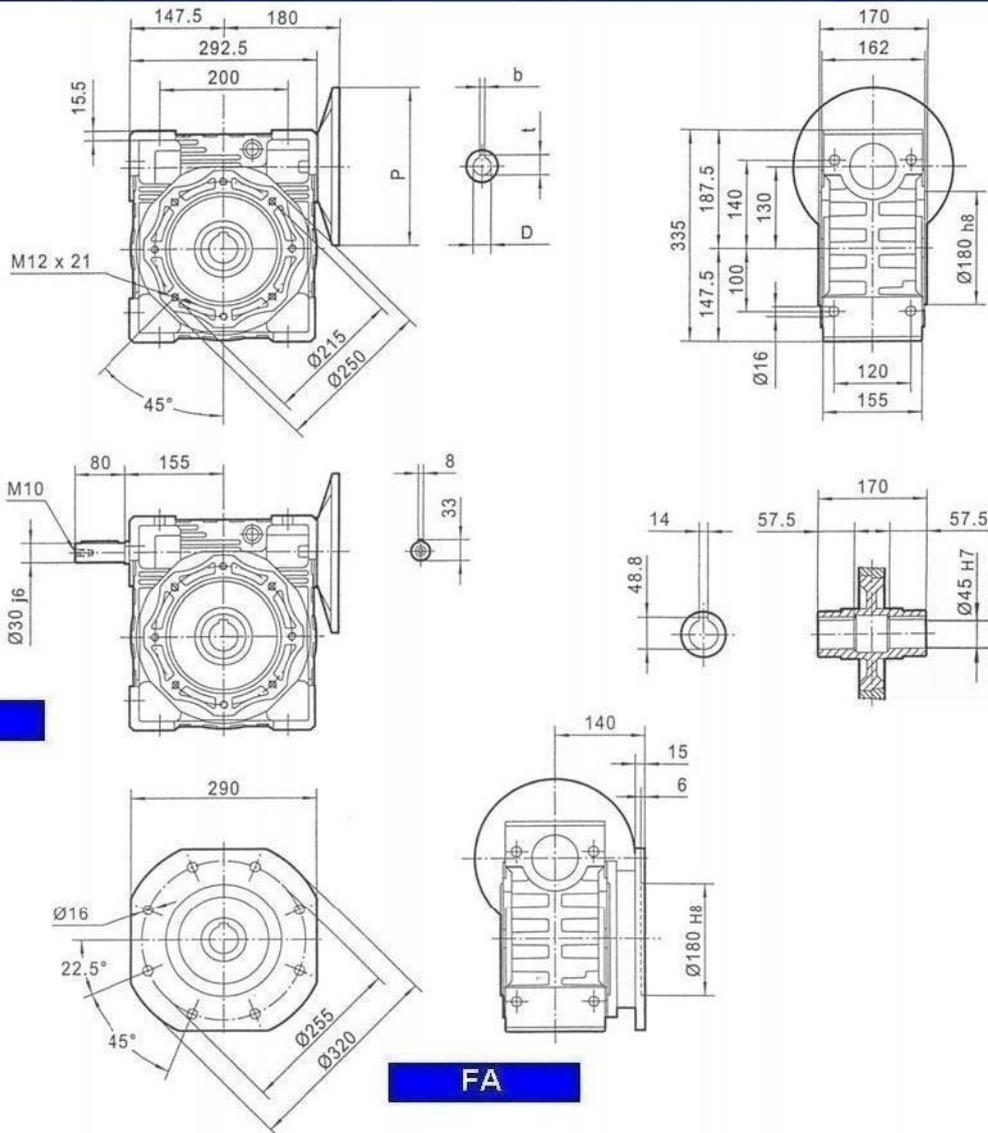

| PAM IEC | P | DE8 | b | t | PAM IEC | P | DE8 | b | t |
|---------|-----|-----|----|------|---------|-----|-----|----|------|
| 132B5 | 300 | 38 | 10 | 41.3 | 132B14 | 200 | 38 | 10 | 41.3 |
| 112B5 | 250 | 28 | 8 | 31.3 | 112B14 | 160 | 28 | 8 | 31.3 |
| 100B5 | 250 | 28 | 8 | 31.3 | 100B14 | 160 | 28 | 8 | 31.3 |
| 90B5 | 200 | 24 | 8 | 27.3 | | | | | |

Weight 48 Kg excluding motor