

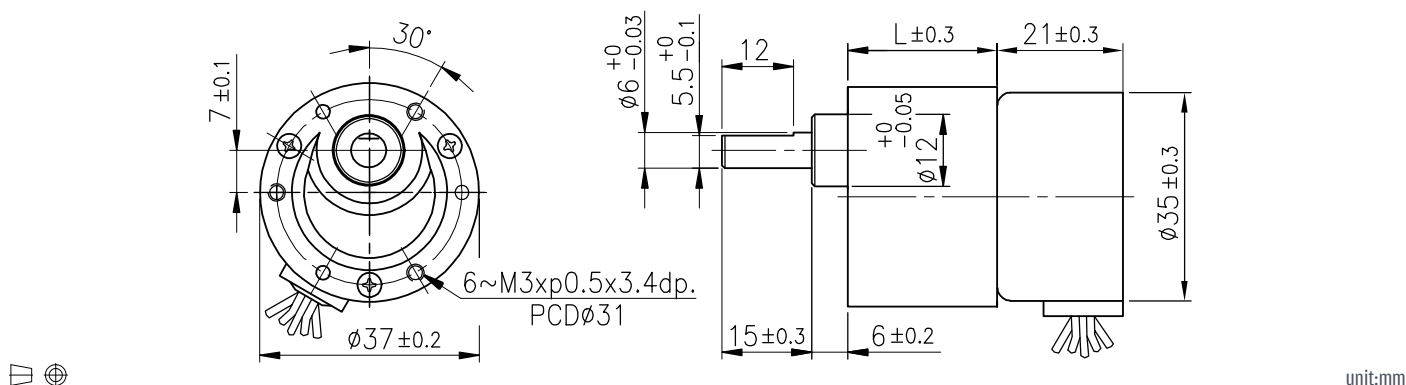


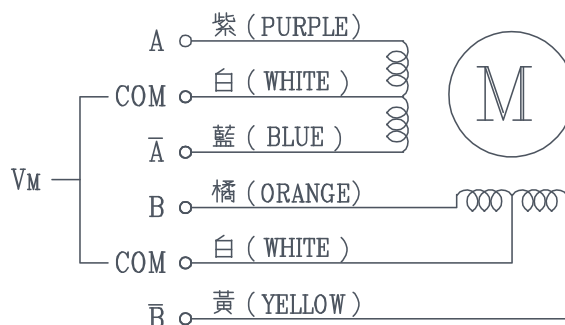

定格電壓 Rated volt (V)	線圈阻抗 Winding Resistance(Ω)	電流 Current Per Phase(mA)	相數 Number of phase	驅動方式 Drive System	迴轉角度 Step Angle (DEG)	拘束轉距 Holding Torque (g.cm)	未激磁轉距 Detent Torque (g.cm)	最大自起動頻率 Max. Starting Frequency (PPS)	最大響應頻率 Max. Response Frequency (PPS)	重量 Weight (g)	
12	65	180	4	Unipolar	7.5°	550	≤ 150	800	900	77	
24	120	200	4	Unipolar	7.5°	550	≤ 150	750	800	77	
減速比 Reduction ratio	1/6-1/10		1/18-1/30		1/36-1/100		1/120-1/300		1/350-1/1000		1/1500-1/3000
長度 Length (L)	19.5		22.0		24.5		27.0		29.5		32.0

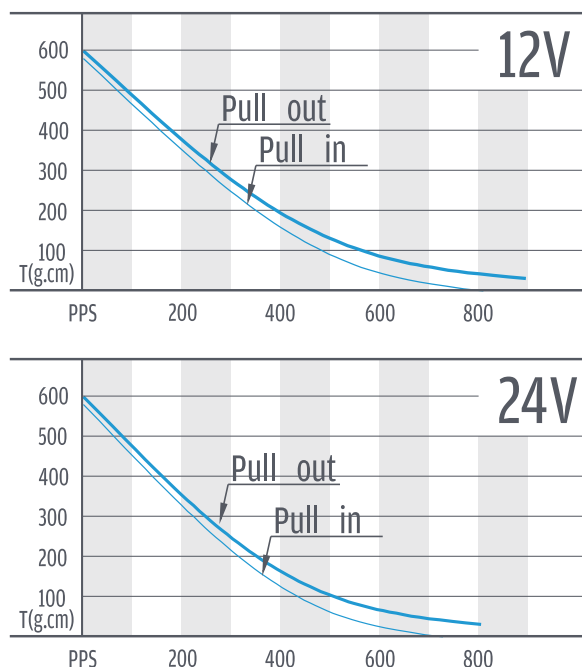

	WIRE COLOR	1	2	3	4	5	6	7	8
A	PURPLE	—			—	—			—
$\bar{A}$	BLUE		—	—			—	—	
COM	WHITE	+	+	+	+	+	+	+	+
B	ORANGE	—	—			—	—		
$\bar{B}$	YELLOW			—	—			—	—