


RB-40GM

03 & 04 TYPE



外形尺寸/ Appearance Size

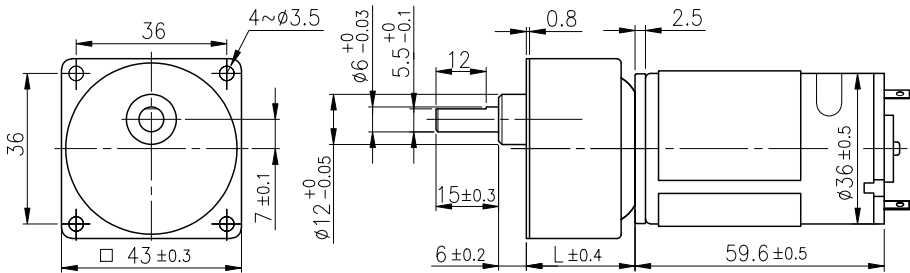

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

	減速比 Reduction ratio	1/10	1/15	1/18	1/25	1/30	1/36	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/360	1/400	1/500
	定格扭力 Rated torque (kg-cm)	1.0	2.7	3.0	4.0	4.0	4.0	5.0	5.0	5.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
12V	定格轉數 Rated speed (rpm)	519	321	275	198	172	145	103	91	72.5	61	54	46	37	31	28.2	22.5	19.2	16	14.5	11.8
	定格轉數 Rated speed (rpm)	530	340	283	207	176	149	107	92	73	61	54	46	37	31	28.5	23	19.1	16.2	14.5	11.8
24V	定格扭力 Rated torque (Kg-cm)	1.0	2.6	3.0	4.0	4.0	4.0	5.0	5.0	5.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0	7.0
	定格轉數 Rated speed (rpm)	530	340	283	207	176	149	107	92	73	61	54	46	37	31	28.5	23	19.1	16.2	14.5	11.8
軸心迴轉方向 Rotation direction		CCW				CW				CCW				CW				CW			
長度 Length (L)		23.9				26.4				28.9				31.4							

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	250	4930	≤ 1600	6000	≤ 250	12.80	220
24	240	5150	≤ 750	6000	≤ 130	12.70	220

馬達單體特性/ Motor Characteristics

