


IG-22PGM

41 & 42 TYPE



外形尺寸/ Appearance Size

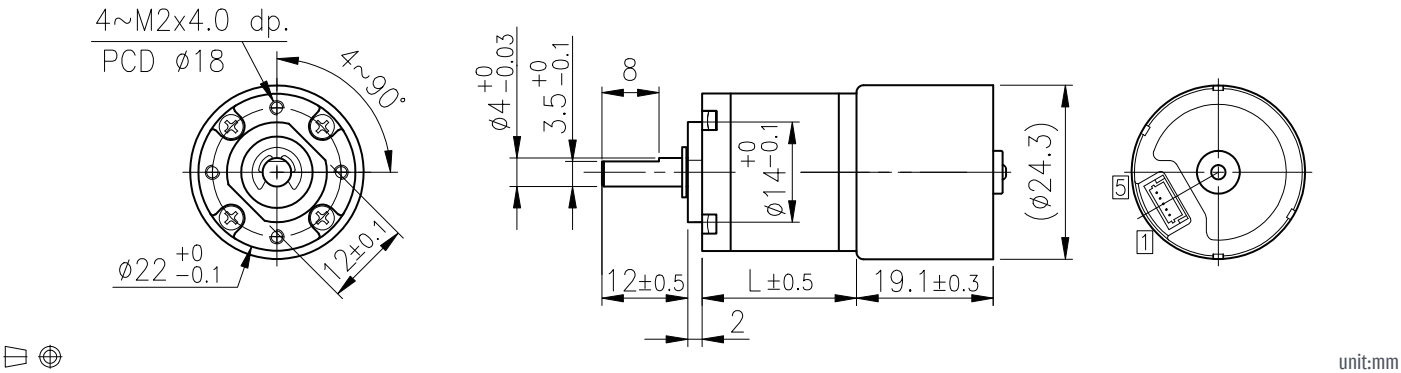

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

減速比 Reduction ratio	1/4	1/14	1/16	1/19	1/53	1/62	1/72	1/84	1/104	1/198	1/231	1/270	1/316	1/370	1/455	1/742	1/1014	1/1249	1/1621	1/1996
12V 定格扭力 Rated torque (g-cm)	100	290	345	400	940	1100	1290	1500	1700	2000	2000	2000	2000	2000	2000	2500	2500	2500	2500	2500
12V 定格轉數 Rated speed (rpm)	1200	380	320	275	100	85	74	63	51	28	25	22	18	16	13	8	6.1	5.1	4.0	3.4
24V 定格扭力 Rated torque (g-cm)	95	270	320	375	885	1030	1200	1400	1700	2000	2000	2000	2000	2000	2000	2500	2500	2500	2500	2500
24V 定格轉數 Rated speed (rpm)	1500	475	405	345	125	105	93	79	64	35	31	27	22.5	19	16	10	7.7	6.3	5.0	4.2
軸心迴轉方向 Rotation direction	CW																			
長度 Length (L)	14.40	18.05	21.70	25.35	29.00															

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	30	5340	≤ 310	7400	≤ 180	1.65	28
24	28	6700	≤ 170	9000	≤ 100	1.93	28

馬達單體特性/ Motor Characteristics

