


RB-37GM

21 & 22 TYPE



外形尺寸/ Appearance Size

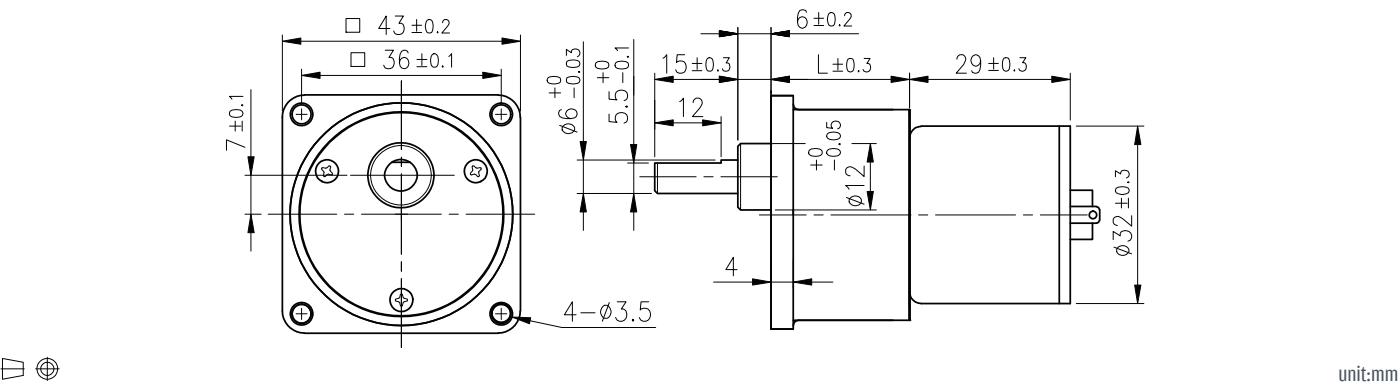

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

	減速比 Reduction ratio	1/10	1/18	1/30	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/500	1/600	1/750	1/1000	
12V	定格扭力 Rated torque (kg-cm)	0.5	0.8	1.3	2.0	2.4	2.9	3.5	3.9	4.2	5.3	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	
	定格轉數 Rated speed (rpm)	490	270	168	100	84	67	57	51	42.5	34	29	26	22	19	11.2	9.5	8.0	6.0	
24V	定格扭力 Rated torque (Kg-cm)	0.5	0.8	1.4	2.0	2.4	3.0	3.6	4.0	4.4	5.4	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	
	定格轉數 Rated speed (rpm)	480	250	160	98	83	65	56	50	41.5	33	28.5	26	22	19	11	9.3	7.9	5.9	
	軸心迴轉方向 Rotation direction	CW	CCW	CW				CCW				CW								
	長度 (L)	19.5	22.0	24.5				27.0				29.5								

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	60	5100	≤ 470	6200	≤ 120	3.14	75
24	62	5000	≤ 210	6200	≤ 60	3.17	75

馬達單體特性/ Motor Characteristics

