


IG-80GM
01 & 02 TYPE



外形尺寸/ Appearance Size

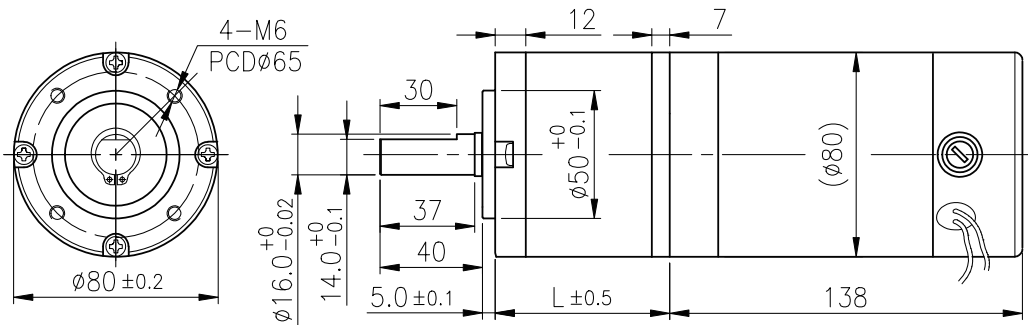

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

	減速比 Reduction ratio	1/4	1/13	1/15	1/19	1/21	1/49	1/55	1/71	1/80	1/103	1/117	1/186	1/210	1/306	1/393	1/445	1/571	1/647			
	定格扭力 Rated torque (Kg-cm)	7.6	22.4	25	32	36	73	82	105	120	125	125	125	125	125	125	125	125	125			
12V	定格轉數 Rated speed (rpm)	445	130	115	90	80	34	30	23.5	21	16.7	14.7	9.3	8.3	5.8	4.5	4.0	3.2	2.8			
	定格轉數 Rated speed (rpm)	470	140	124	95	85	36	32	25.5	23	17.8	15.6	9.9	8.8	6.0	4.7	4.2	3.3	2.9			
24V	定格扭力 Rated torque (Kg-cm)	9.7	28.6	32	41	47	93	99	125	125	125	125	125	125	125	125	125	125	125			
	定格轉數 Rated speed (rpm)	470	140	124	95	85	36	32	25.5	23	17.8	15.6	9.9	8.8	6.0	4.7	4.2	3.3	2.9			
軸心迴轉方向 Rotation direction		CW																				
長度 Length (L)		52.3		68.8					85.3						101.8							

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	2500	1700	≤ 5300	2000	≤ 1100	43.6	1650
24	3200	1800	≤ 3400	2000	≤ 600	59.0	1650

馬達單體特性/ Motor Characteristics

