


RB-37GM

11 & 12 TYPE



外形尺寸/ Appearance Size

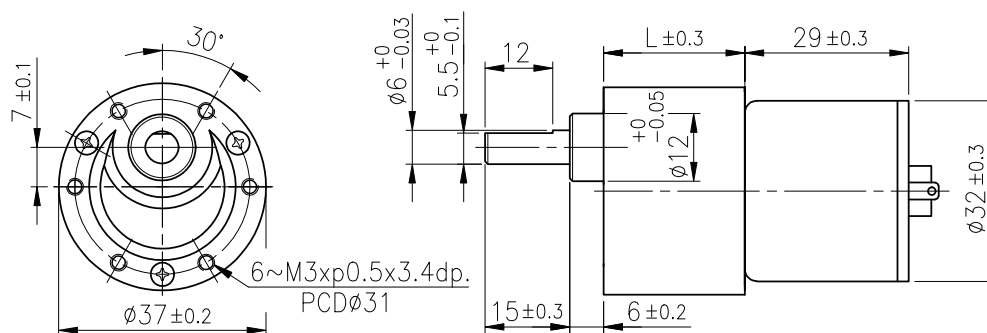

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

		1/10	1/18	1/30	1/50	1/60	1/75	1/90	1/100	1/120	1/150	1/180	1/200	1/250	1/300	1/500	1/600	1/750	1/1000	1/1500	1/3000
12V	減速比 Reduction ratio																				
	定格扭力 Rated torque (kg-cm)	0.5	0.8	1.3	2.0	2.4	2.9	3.5	3.9	4.2	5.3	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
24V	定格轉數 Rated speed (rpm)	490	270	168	100	84	67	57	51	42.5	34	29	26	22	19	11.2	9.5	8.0	6.0	4.1	2.0
	定格扭力 Rated torque (Kg-cm)	0.5	0.8	1.4	2.0	2.4	3.0	3.6	4.0	4.4	5.4	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0	6.0
24V	定格轉數 Rated speed (rpm)	480	250	160	98	83	65	56	50	41.5	33	28.5	26	22	19	11	9.3	7.9	5.9	4.0	2.0
	軸心迴轉方向 Rotation direction	CW	CCW																		
24V	長度 Length (L)	19.5	22.0																		

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	60	5100	≤ 470	6200	≤ 120	3.14	75
24	62	5000	≤ 210	6200	≤ 60	3.17	75

馬達單體特性/ Motor Characteristics

