


IG-28GM
03 & 04 TYPE



外形尺寸/ Appearance Size

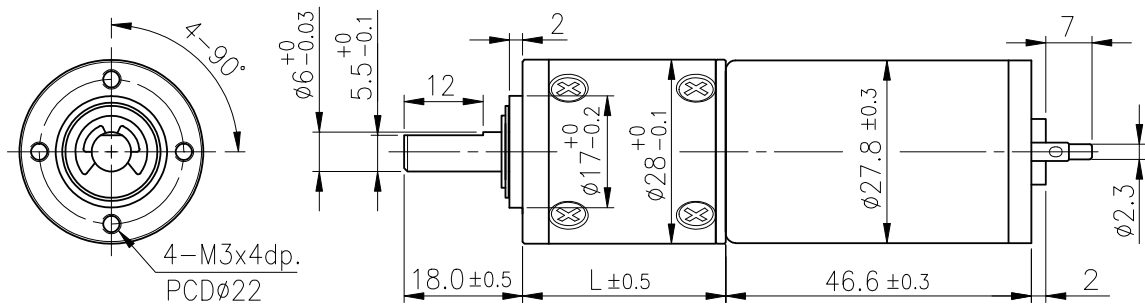

unit:mm

齒輪馬達轉矩 & 速度/ Geared Motor Torque & Speed

	減速比 Reduction ratio	1/5	1/14	1/19	1/27	1/35	1/51	1/71	1/100	1/139	1/189	1/264	1/516	1/721	1/939				
12V	定格扭力 Rated torque (Kg-cm)	0.32	0.75	1.0	1.4	1.9	2.4	3.3	4.7	6.6	7.4	10	10	10	10				
	定格轉數 Rated speed (rpm)	1000	375	270	193	148	102	73	52	37.3	27.5	19.7	10.5	7.5	5.7				
24V	定格扭力 Rated torque (Kg-cm)	0.38	0.9	1.2	1.7	2.3	2.8	4.0	5.6	7.8	8.8	10	10	10	10				
	定格轉數 Rated speed (rpm)	990	370	265	191	147	101	72	51.5	36.9	27.2	19.3	10.4	7.4	5.7				
軸心迴轉方向 Rotation direction		CCW																	
長度 Length (L)		24.5		30.9				37.3				43.7							

馬達單體型式/ Motor Data

定格電壓 Rated volt (V)	定格扭力 Rated torque (g-cm)	定格轉數 Rated speed (rpm)	定格電流 Rated current (mA)	無負荷轉數 No load speed (rpm)	無負荷電流 No load current (mA)	定格出力 Rated output (W)	重量 Weight (g)
12	79	5200	≤ 500	6000	≤ 130	4.22	93
24	94	5140	≤ 300	6000	≤ 80	4.96	91

馬達單體特性/ Motor Characteristics

